



# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

October 26, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/503,780

FILING DATE: September 18, 2003

RELATED PCT APPLICATION NUMBER: PCT/US04/30807

Certified by



Jon W Dudas



Acting Under Secretary of Commerce  
for Intellectual Property  
and Acting Director of the U.S.  
Patent and Trademark Office

Please type a plus sign (+) inside this box



Approved for use through 4/30/2003. OMB 0351-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

19587 U.S. PTO  
60/503780  
09/18/03

## PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
Stephen		MARTONE		Westford, MA	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
BRAIDED MINIMALLY INVASIVE CHANNEL					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number				<div>Place Customer Number Bar Code Label here</div>	
OR Type Customer Number here					
<input checked="" type="checkbox"/> Firm or Individual Name		William H. Dippert, Esq.			
Address		Reed Smith LLP			
Address		599 Lexington Avenue, 29th Floor NY 10022-7650			
City		New York		State	NY
Country		U.S.A.		ZIP	10022-7650
		Telephone	(212) 521-5400	Fax	(212) 521-5450
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/>	Specification	Number of Pages	13	<input type="checkbox"/>	CD(s), Number
<input checked="" type="checkbox"/>	Drawing(s)	Number of Sheets	2	<input type="checkbox"/>	Other (specify)
<input type="checkbox"/>	Application Data Sheet. See 37 CFR 1.76				
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input checked="" type="checkbox"/>	Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)
<input type="checkbox"/>	A check or money order is enclosed to cover the filing fees				
<input checked="" type="checkbox"/>	The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number				\$80.00
<input type="checkbox"/>	Payment by credit card. Form PTO-2038 is attached.				
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/>	No.				
<input type="checkbox"/>	Yes, the name of the U.S. Government agency and the Government contract number are: _____				

Respectfully submitted,

SIGNATURE

TYPED or PRINTED NAME Maier Fenster

TELEPHONE

(212) 521-5400

Date 09/18/2003

REGISTRATION NO.

(if appropriate)

Docket Number:

Reg. No. 41,016

386/03702

### USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-0100 and select option 2.

P1MALL/REV05

**Certificate of Express Mail Under 37 CFR 1.10**


I hereby certify that this correspondence is being deposited with the United States Postal Service Express Mail under 37 CFR 1.10 on the date indicated below and is addressed to:

Mail Stop: Provisional Patent Application  
Commissioner For Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

on September 18, 2003  
Date

**EV304051403US**

Express Mail Label



William H. Dippert, Registration No. 26,723

Reed Smith LLP  
599 Lexington Avenue  
29th Floor  
New York, New York 10022-7650  
Telephone: 212-521-5400; Facsimile: 212-521-5450

Note: Each paper must have its own certificate of mailing, or this certificate must identify each submitted paper.

Applicant: Stephen Martone, et al.  
Serial No: To Be Assigned  
Filing Date: September 18, 2003, herewith  
For: BRAIDED MINIMALLY INVASIVE CHANNEL  
Enclosures: (1) Provisional Patent Application Cover Sheet (in duplicate); (2) Specification (13 pages);  
(3) Formal drawings (2 sheets); (4) Acknowledgement Postcard.

38603702

## **BRAIDED MINIMALLY INVASIVE CHANNEL**

### **FIELD OF THE INVENTION**

The present invention relates to channels of minimally invasive medical tools, such as catheters and endoscopes.

5

### **BACKGROUND OF THE INVENTION**

In minimally invasive procedures, a catheter, endoscope or other elongate probe is inserted into a patient cavity, for diagnosis and/or treatment. In order to allow insertion of the elongate probe into the patient, the probe should be flexible, but strong, in order to resist stretching under tension and collapsing under compression. In addition, the elongate probe should be kink resistant. Also, in some cases it is desired that the elongate probe transfer a torque applied at its proximal end to the distal end.

10 U.S. patent 6,554,820 to Wendlandt et al., the disclosure of which is incorporated herein by reference, describes a composite medical tube that includes one or more coils and braids, which strengthen the tube. The braids and/or coils are embedded, at least partially, in an elastomeric material. A smooth inner layer formed of Teflon or a silicon based material is disposed on the radially inner surface of the channel so that medical tools inserted in the channel are surrounded by a smooth surface.

15 U.S. patent 6,440,124 to Esch et al., the disclosure of which is incorporated herein by reference, describes a delivery catheter formed of inner and outer tubes, which in one embodiment has an inner braided shaft. Additional catheters having a braid embedded within a tube are described, for example, in U.S. patents 2,437,542 to Krippendorf, U.S. patent 6,143,013 to Samson et al., and U.S. patent 4,425,919 to Alston et al., the disclosures of which patents are incorporated herein by reference.

25 Some of these probes define a working channel through which medical tools and/or liquids may be delivered to a body cavity at the distal end of the elongate probe. The working channel is used, in some cases, to lead tools to a treated location in a patient. The inner surface of the working channel therefore needs to be slippery in order to allow smooth leading of tools to the distal end without getting stuck along the way. In order to be slippery, the material of the inner surface needs to be hard, a requirement that contradicts the need of the probe to be flexible. In some cases, therefore, a relatively rigid plastic extrusion tube, for defining a working channel, is inserted into the elongate probe after the elongate probe is located in the body cavity. This solution lengthens the minimally invasive procedure and is not always feasible.

In some cases, the working channel is used to apply suction to the treated location. The working channel therefore needs to be strong enough so as not to collapse due to the suction.

Some elongate probes are not dedicated for a single task, but rather can be used for a plurality of different tasks. For example, an endoscope may have, in addition to a camera and wiring therefore, a working channel for introducing liquids to wash a window of the camera. The working channel is defined by an auxiliary tube, which may be located in the endoscope while the endoscope is inserted into the patient or may be inserted into the endoscope after the endoscope is within the patient.

In order to avoid contamination, disposable sheaths are used to cover elongate probes inserted into the patient. In some case, the sheaths include a tube that defines a working channel. Disposable sheaths are generally very floppy and require a working channel of complex construction in order to apply suction and/or deliver medical tools.

U.S. patent 6,293,909 to Chu et al., the disclosure of which is incorporated herein by reference, describes an endoscopic assembly covered by an expandable braided mesh sheath. The expendable mesh sheath may be expanded in order to anchor the assembly in a body cavity, take samples from the patient and/or dilate a stricture in the body cavity. When desired to replace an endoscope located within the mesh sheath while the sheath is in a patient, the endoscope is removed from the mesh sheath, the mesh sheath is expanded to make room for insertion of a different tool, such as a bougie and the other tool is then inserted to the mesh sheath.

#### SUMMARY OF THE INVENTION

An aspect of some embodiments of the present invention relates to an auxiliary tube, for defining a working channel, formed at least partially by a braid or mesh. The auxiliary tube is used together with an elongate probe (e.g., an endoscope or catheter), such that during use, the auxiliary tube is within the elongate probe or along side the elongate probe. In some embodiments of the invention, the tube defining the working channel is located off-axis from the central axis of the assembly. Optionally, the tube is included within an outer sheath or other external tube that encompasses both the auxiliary tube and the elongate probe.

The auxiliary tube is either inserted into the patient together with the elongate probe or after the elongate probe is properly positioned, through a channel defined by the elongate probe.

An auxiliary tube comprising a braid, is made in accordance with embodiments of the invention, sufficiently strong radially so that medical tools can be passed safely through the

tube without risk of rupture of the tube, while still being flexible due to relative movement between the strands of the braid. The flexibility is desired especially in those embodiments in which the auxiliary tube is inserted into the patient together with the elongate probe, so that the overall probe assembly inserted into the patient is easily maneuvered and causes less trauma to  
5 body cavities. In addition, even if the braided tube collapses it can still be used for passing fluids, e.g., for suction, due to the volume between the strands and/or the volume of an outer channel in which it is located, which is held open by the strands. Defining a working channel by a braided tube allows, in accordance with some embodiments of the invention, for easier collapsing of the tube when not in use, for limiting the cross-section of an assembly including  
10 an elongate probe and the working channel during insertion into the patient.

In some embodiments of the invention, the braided auxiliary tube is located within a channel defined by the elongate probe or a sheath covering the probe. In an exemplary embodiment of the invention, the elongate probe is surrounded by inner and outer sheaths and the braided tube is located between the sheaths. The braided tube is optionally a relatively  
15 durable structure positioned within an external channel defined between the sheaths. The braided tube thus prevents collapse of the channel, while it is used. Alternatively, even when the braided tube collapses the channel of the braided tube is not totally blocked, due to the braided structure. When the braid is not fluid-impervious, the advantages of the firm structure of the tube is enjoyed, while still enjoying the larger cross-sectional volume of the external  
20 channel, for example for suction.

An aspect of some embodiments of the invention relates to passing medical tools into a body cavity along walls of a working channel defined by a tube whose inner surface reflects the texture of a braid of the tube. Although a braid texture may be less desired than a flat plastic extrusion, for inserting tools, the advantages of using a braid which is resilient and  
25 flexible while still being slippery outweigh the disadvantage of the braid texture.

Optionally, the inner surface of the tube is formed of an uncoated braid, so that the strands of the braid are allowed to flex freely relative to each other.

In some embodiments of the invention, a braid is inserted into a probe channel already located in the patient, to provide a lining required for better insertion of tools. Alternatively, a  
30 braided tube is inserted into a relatively large channel after the large channel is already located in body cavity in order to better define the channel.

### BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary non-limiting embodiments of the invention will be described with reference to the following description of the embodiments, in conjunction with the figures. Identical structures, elements or parts which appear in more than one figure are preferably labeled with a same or similar number in all the figures in which they appear, and in which:

Fig. 1A is a schematic side view of a sheath assembly including a braided tube defining a working channel, in accordance with an exemplary embodiment of the present invention;

Fig. 1B is a cross-sectional view of the sheath assembly of Fig. 1A, in accordance with an exemplary embodiment of the present invention;

Fig. 1C is a cross-sectional view of the sheath assembly of Fig. 1A, in a closed state, in accordance with an exemplary embodiment of the present invention;

Fig. 2 is a schematic illustration of a braided tube, in accordance with an exemplary embodiment of the invention;

Fig. 3 is a schematic cross-sectional view of a sheath assembly, in accordance with another exemplary embodiment of the invention; and

Fig. 4 is a schematic cross-sectional view of a sheath assembly, in accordance with still another exemplary embodiment of the invention.

### DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Figs. 1A and 1B are a schematic side view and a cross sectional view of a sheath assembly 100, in accordance with an exemplary embodiment of the present invention. Assembly 100 optionally includes an annularly internal sheath 102 adapted to receive an endoscope and isolate the endoscope from the environment. An external sheath 108, having a larger circumference than internal sheath 102, optionally surrounds internal sheath 102. A braided tube 114, which defines a working channel 112, optionally runs along internal sheath 102, within external sheath 108. In some embodiments of the invention, channel 112 is used for introducing tools to the distal end of sheath assembly 100. Alternatively or additionally, channel 112 is used for applying suction and/or for introducing fluids to the distal end of sheath assembly 100. Channel 112 may have substantially any inner diameter suitable for its task, for example a diameter of about 2 mm, which is conventional in the art.

Braided tube 114 is optionally used to provide a working channel within the volume between sheaths 102 and 108. The use of a braided tube 114, rather than a plastic extrusion tube for example, provides for both flexibility and resilience due to the relative movement of strands of the braid, while still providing relative rigidity. The flexibility allows easier insertion

of braided tube 114 into the patient, either together with assembly 100 or after the assembly is within the patient. Tube 114 optionally provides a slippery inner surface to facilitate easy insertion of tools. In addition, tube 114 has rigidity (e.g., radial strength) which provides some resistance to collapse of tube 114 which would block channel 112. In addition, even if tube 114 collapses, the volume between the strands of the tube would still allow passage of fluids along the tube and/or in a channel between sheaths 102 and 108 held open at least partially by tube 114. Fig. 1C is a schematic cross-sectional illustration of sheath assembly 100 in a folded position, in accordance with an exemplary embodiment of the invention. It is noted that the elements in Fig. 1C are shown out of scale, for clarity. During insertion of an endoscope with sheath assembly 100 into a patient, braided tube 114 and external sheath 108 are optionally folded around internal sheath 102, such that the cross-sectional area of an endoscope with sheath assembly 100, during insertion, is not substantially enlarged by the inclusion of external sheath 108 and braided tube 114.

Fig. 2 is a schematic view of braided tube 114, in accordance with an exemplary embodiment of the present invention. Tube 114 comprises a plurality of strands 204 oriented in a first direction, woven into a plurality of strands 206 in an opposite direction, forming a mesh structure. In an exemplary embodiment of the invention, braided tube 114 includes between 24-48 groups of strands, for example 36 groups of strands. The number of strands used is optionally selected according to the desired flexibility of tube 114 and the desired size of the inner lumen of the tube. Alternatively or additionally, any other braid structure known in the art for use in catheters, endoscopes, elongate probes or other devices may be used.

In some embodiments of the invention, the inner surface of braided tube 114 is rough, following the braiding structure of strands 204 and 206. When braided tube 114 is bent within a body cavity along with sheath assembly 100, the braided inner surface of tube 114 prevents medical tools and/or other accessory devices passing in channel 112 from getting stuck on the inner wall of the tube, since there is less contact area between the passing tools and the tube walls and hence there is less drag. Optionally, the material of the braid has a lower friction coefficient than sheath 108, to further facilitate the passage of tools through channel 112. In some embodiments of the invention, for simplicity of production, the inner surface of braided tube 114 is not coated, such that tools passing through the channel directly contact strands 204 and 206. Alternatively, the inner surface of braided tube 114 is coated with a very thin coating layer, which does not substantially affect the inner surface texture of braided tube 114. The coating may include, for example, polymeric coatings and/or oils which enhance lubricity. In



some embodiments of the invention, the coating is sufficiently flexible so that the entire tube flexes together. Alternatively, the coating is only loosely connected to the braid, so that the coating does not break when the braid is collapsed. Alternatively to an outer coating, the inner surface of braided tube 114 is covered with a coating that provides a smooth inner surface of the walls, when required to enhance kink resistance at the expense of the advantages of having  
5 an inner braid texture with strands that move independently relative to each other.

The coating may make braided tube 114 liquid impervious, so that liquids passing within channel 112 do not penetrate the walls of the tube. It is noted, however, that as discussed below, in some embodiments of the invention, the walls of braided tube 114 are purposely  
10 pervious to liquids.

External sheath 108 optionally includes a relatively thin and flexible material so that it only minimally adds to the cross-sectional area of the sheath assembly when it is inserted into the patient. In addition, the flexibility of external sheath 108 allows it to be expanded onto walls of a body cavity in which assembly 100 is located, in a manner which conforms with the  
15 shape of the body cavity.

Braided tube 114 optionally includes a more rigid material than external sheath 108 so as to define a channel of a required shape, according to the intended use of channel 112. The use of a relatively resilient tube to define a working channel allows relatively easy introduction of medical tools into the body cavity, without special means intended to prevent collapse of  
20 external sheath 108 onto the tool and/or twisting of the tool around internal sheath 102. In addition, absent braided tube 114, when external sheath 108 is partially connected to internal sheath 102, tools introduced in the volume between internal sheath 102 and external sheath 108 may get stuck in edges where the sheaths are connected.

In some embodiments of the invention, external sheath 108 comprises an elastic  
25 material, such as polyurethane or polyvinylchloride with a sufficiently large amount of added plasticizer, that can bend longitudinally around corners while the sheathed endoscope is inserted into the patient. Strands 204 and 206 comprise a more rigid, non-elastic plastic material, such as polyester, Polyethyleneterephthalate (PET), polyvinylchloride with a relatively small amount of added plasticizer, or a very thin (e.g., between about 0.05-0.1 mm) layer of  
30 Teflon or Polyethylene. In other embodiments of the invention, external sheath 108 comprises a more rigid material and accordingly strands 204 and 206 comprise materials more rigid than external sheath 108. Further alternatively or additionally, braided tube 114 has substantially the same rigidity as external sheath 108.

In an exemplary embodiment of the invention, strands 204 and 206 comprise polyester strands with a diameter of about 0.001 inches, such that braided tube 114 has a wall thickness of about 0.3-0.4 mm.

Alternatively to all of strands 204 and 206 having a same structure, different strands of braided tube 114 have a different thickness and/or material composition.

In some embodiments of the invention, strands 204 and 206 are tightly braided, without leaving substantial spaces between the strands, so that tube 114 is liquid impervious or to substantially limit the fluid exchange between the interior and exterior of tube 114. Optionally, the spaces between the strands are smaller than the tool or tools to be passed through the tube 114. These embodiments are especially useful when tube 114 is primarily used for insertion of tools. In some embodiments of the invention, tube 114 is coated on its external surface with a fluid impervious coating, to prevent escape of liquids passed through channel 112. Such imperviousness for liquids is useful to prevent contamination of the endoscope in case inner sheath 102 is ruptured. Alternatively or additionally, the internal surface of braided tube 114 is coated.

In an alternative embodiment of the invention, strands 204 and 206 are loosely braided, leaving open spaces between adjacent strands. In accordance with this alternative, braided tube 114 may be used to keep external sheath 108 separated from internal sheath 102, so that suction can be applied to and/or liquids passed through the volume between the sheaths, without external sheath 108 collapsing onto internal sheath 102.

The extent to which braided tube 114 separates channel 112 from the area external to the tube may be the same over the entire length of the tube or may vary along the tube. For example, different coatings (including no coating at all) may be used for different longitudinal portions of the tube and/or the tightness of the braid may vary along the length of the tube.

In some embodiments of the invention, braided tube 114 is formed in a non-self-collapsible manner, such that once opened channel 112 does not close unless a force to induce the collapse is applied to the channel. For example, the material of braided tube 114 may be deformed in a predetermined shape, such that it does not collapse after being unfolded. Optionally, braided tube 114 is deformed over its entire length. Alternatively, braided tube 114 is deformed in one or more locations along its length, which locations are sufficient to prevent collapse of channel 112. Further alternatively, stent-like structures are embedded within braided tube 114 along its length and/or are attached to its outer surface, in order to prevent

collapse of tube 114 after it is unfolded. Further alternatively, braided tube 114 is formed in a self-collapsible manner, such that when not held open, channel 112 closes.

Alternatively to including a single braided tube 114 between inner sheath 102 and outer sheath 108, in some embodiments of the invention, a plurality of braided tubes are provided along sheath assembly 100. For example, one or more tubes may be used for tool insertion while another tube is used for suction. Further alternatively or additionally, one or more non-braided tubes (or a tube including an inner braid that does not affect the inner surface of the tube) are included in sheath assembly 100. In some embodiments of the invention, the volume between inner sheath 102 and external sheath 108 is used as an additional channel.

In the above description external sheath 108 and braided tube 114 are described as being in a collapsed state, while sheath assembly 100 is inserted into the patient. In other embodiments of the invention, only external sheath 108 is collapsed during the insertion into the patient, while braided tube 114 is open or partially open. Further alternatively, neither of external sheath 108 or braided tube 114 is collapsed while sheath assembly 100 is inserted into the patient.

Fig. 3 is a schematic cross-sectional view of a sheath assembly 300, in accordance with an exemplary embodiment of the invention. In the embodiment of Fig. 3, a main sheath 302 is devised to receive an endoscope. An additional braided tube 304 defining a channel 306 is mounted on a side of main sheath 302. In some embodiments of the invention, the width along which main sheath 302 and braided tube 304 are connected is relatively wide (e.g., close to the diameter of channel 306). Alternatively, the width along which main sheath 302 and braided tube 304 are connected is relatively narrow, allowing both sheaths to define round channels. In some embodiments of the invention, channel 306 is designed to have a thin cross-section, for example with an elliptical shape, such that a relatively large channel cross sectional area can be achieved, without extending too far away from the body of the endoscope. Optionally, during insertion, braided tube 304 is folded or pleated, so as to minimize the cross-section of assembly 300 during insertion to the patient.

In this embodiment, the considerations on the extent to which braided tube 304 separates channel 306 from its exterior may be different from the considerations regarding braided tube 114, as braided tube 304 is not surrounded by an external sheath. When, for example, braided tube 304 is used for suction, it is desired that braided tube 304 be fluid impervious, so that the suction reaches the distal end of channel 306.

Fig. 4 is a cross-sectional view of an endoscope sheath assembly 400, in accordance with an exemplary embodiment of the invention. Sheath assembly 400 comprises a sheath 402 shaped and sized to receive an endoscope (not shown) in a channel 404. In addition, sheath 402 defines a working channel 408. In order to allow for easier insertion of tools through working channel 408, a braided tube 410 is positioned within working channel 408. Braided tube 410 provides a resilient structure which reduces the chances that channel 408 will collapse. Optionally, braided tube 410 is not connected to working channel 408 but is rather kept in place due to its being within the working channel 408. Alternatively, braided tube 410 is connected to working channel 408 by an adhesive or any other suitable coupling means. In addition, a limited amount of suction can be applied through the spaces between the strands of braided tube 410 even if the braided tube collapses. Furthermore, as discussed above, braided tube 410 prevents tools passing through working channel 408 from puncturing sheath 402.

In some embodiments of the invention, braided tube 410 is located within working channel 408 when sheath assembly 400 is inserted into the patient. Alternatively, braided tube 410 is inserted into working channel 408 after assembly 400 is positioned within the patient. In some embodiments of the invention, in accordance with this alternative, any of the methods known in the art may be used to aid in leading braided tube 410 into working channel 408. In an exemplary embodiment of the invention, braided tube 410 is associated with a dove tail and sheath 402 defines a respective notch for receiving the dove tail, as described in U.S. provisional patent application 60/491,971, filed August 4, 2003, titled "Sheath with Channel for Endoscope", the disclosure of which is incorporated herein by reference. The dove tail may be braided along with tube 410 and/or may be connected to the braided tube with an adhesive.

Although working channel 408 is shown as completing a circular cross sectional shape of sheath assembly 400, sheath assembly 400 may have any other shape. For example, channel 404 for receiving the endoscope may have a circular shape, while working channel 408 bulges out of the circular shape.

Although the above description relates to a sheath assembly for an endoscope, the sheath assemblies of the present invention may be used with any other elongate probes, including ultrasound probes, catheters and other medical devices. Furthermore, the braided tube of the present invention may be used along with an elongate probe itself, rather than a sheath. For example, in the embodiments of Fig. 1A and Fig. 3, the internal sheath may be replaced by a catheter, not necessarily covered by a sheath.

Furthermore, a braided working tube, with or without a leading element (e.g., a dove tail), may be used together with substantially any sheath or non-sheathed medical probe.

It will be appreciated that the above-described methods may be varied in many ways, including changing sizes and materials used in forming the elements of the sheath assemblies.

- 5 For example, the braided tubes of the present invention do not necessarily have a circular cross section, and may have other cross section shapes, such as elliptical. It should also be appreciated that the above described description of methods and apparatus are to be interpreted as including apparatus for carrying out the methods, and methods of using the apparatus.

- 10 The present invention has been described using non-limiting detailed descriptions of embodiments thereof that are provided by way of example and are not intended to limit the scope of the invention. It should be understood that features and/or steps described with respect to one embodiment may be used with other embodiments and that not all embodiments of the invention have all of the features and/or steps shown in a particular figure or described with respect to one of the embodiments. Variations of embodiments described will occur to persons  
15 of the art. Furthermore, the terms "comprise," "include," "have" and their conjugates, shall mean, when used in the claims, "including but not necessarily limited to."

- It is noted that some of the above described embodiments may describe the best mode contemplated by the inventors and therefore may include structure, acts or details of structures and acts that may not be essential to the invention and which are described as examples.  
20 Structure and acts described herein are replaceable by equivalents which perform the same function, even if the structure or acts are different, as known in the art. Therefore, the scope of the invention is limited only by the elements and limitations as used in the claims.

# **CLAIMS**

1. A probe assembly, comprising:  
an elongate tube for insertion into a body cavity, having a longitudinal central axis; and  
a braided tube comprising a braid, coupled to the elongate tube, within the elongate  
5 tube or along side but not surrounding the elongate tube, wherein a central longitudinal axis of  
the elongate tube does not coincide with the central axis of the braided tube.
2. An assembly according to claim 1, wherein the elongate tube comprises a catheter.
- 10 3. An assembly according to claim 1, wherein the elongate tube comprises an endoscope.
4. An assembly according to claim 1, wherein the elongate tube comprises a sheath  
adapted for isolating an elongate probe from a patient's body.
- 15 5. An assembly according to claim 1, wherein the inner surface of the braided tube has a  
texture of the braid.
6. An assembly according to claim 5, wherein the inner surface of the braided tube  
comprises an uncoated braid surface.
- 20 7. An assembly according to claim 1, comprising a sheath adapted to receive the elongate  
tube and the braided tube adjacent each other.
8. An assembly according to claim 1, comprising an internal sheath adapted to receive the  
25 elongate tube and an external sheath surrounding the internal sheath, wherein the braided tube  
is located between the internal and external sheaths.
9. An assembly according to claim 8, wherein the braided tube is more resilient than the  
internal and external sheaths.
- 30 10. An assembly according to claim 8, wherein the braided tube is pervious to liquids.

386/03702

11. An assembly according to claim 1, wherein the axis of the braided tube is located outside the elongate tube.
12. An invasive probe assembly, comprising:  
5 an elongate tube for insertion into a body cavity; and  
a braided tube having an inner surface texture following a braid of the tube, coupled to the elongate tube, within the elongate tube or along side but not surrounding the elongate tube.
13. An assembly according to claim 12, wherein the braided tube is substantially liquid-  
10 impervious.
14. An assembly according to claim 12, wherein the braid of the braided tube has holes between strands of the braid.
- 15 15. An assembly according to claim 12, wherein the braided tube is more flexible than the elongate tube.
16. An assembly according to claim 12, wherein the braided tube can apply suction along its length even in a collapsed state, due to spaces between strands forming the braid.  
20
17. An assembly according to claim 12, wherein the braided tube comprises a non-braided coating on its external surface.
18. An assembly according to claim 12, wherein the braided tube comprises a non-braided  
25 coating on its internal surface.
19. An assembly according to claim 12, wherein the braided tube does not have a non-braided coating on its internal surface.
- 30 20. A method of performing a medical procedure, comprising:  
inserting a tube comprising a braid in a folded state into a cavity of a patient;  
opening the tube with the braid within the cavity; and  
passing a tool or fluid through the opened braided tube.

21. A method of performing a medical procedure, comprising:  
providing a braided tube having an inner surface texture following a braid of the tube;  
inserting the braided tube into a cavity of a patient; and  
5 passing a tool or fluid through the braided tube while it is in the cavity, such that the  
tool or fluid impinge on the inner surface of the braided tube while being passed through the  
tube.
22. A method according to claim 21, wherein passing the tool or fluid comprises passing a  
10 fluid.
23. A method according to claim 22, wherein passing the fluid comprises applying suction.
24. A method according to claim 22, wherein passing the fluid comprises inserting a liquid  
15 through the braided tube into the body cavity.
25. A probe assembly, comprising:  
an elongate tube for insertion into a body cavity; and  
a braided tube comprising a braid, coupled to the elongate tube, within the elongate  
20 tube or along side but not surrounding the elongate tube, wherein the braided tube is more  
flexible than the elongate tube.
26. A probe assembly, comprising:  
an elongate tube for insertion into a body cavity; and  
25 a braided tube comprising a braid, coupled to the elongate tube, within the elongate  
tube or along side but not surrounding the elongate tube, wherein the braided tube comprises  
strands which move independently relative to each other.
27. A probe assembly, comprising:  
30 an elongate tube for insertion into a body cavity; and  
a collapsible braided tube comprising a braid, coupled to the elongate tube, within the  
elongate tube or along side but not surrounding the elongate tube, wherein the braided tube  
may be collapsed into a closed state and reopened into an opened state.



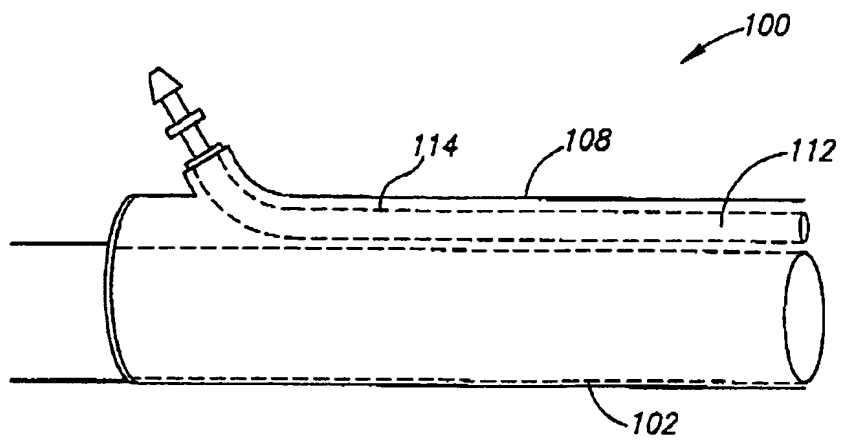


FIG.1A




FIG.1B




FIG.1C

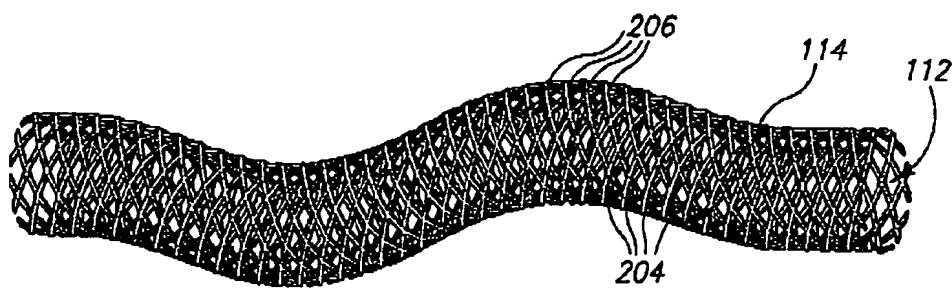


FIG. 2

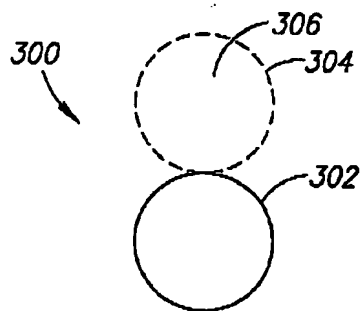


FIG. 3

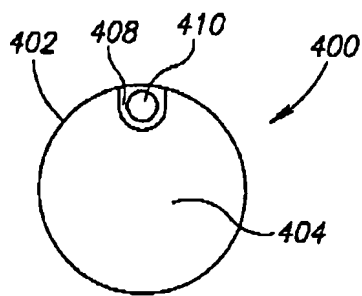


FIG. 4

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/030807

International filing date: 20 September 2004 (20.09.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/503,780  
Filing date: 18 September 2003 (18.09.2003)

Date of receipt at the International Bureau: 01 November 2004 (01.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse